

3M™ Multimedia Projector MP7740i

- > Portable Performance
- > Perfect for SOHO professionals
- > Use it in the office for presentations
-or- at home for the big game
- > Ideal for smaller meetings




CONNECTIONS

COMPUTER

- > RGB
- > Audio (stereo mini)
- > Serial Control

VIDEO

- > Component (3)
- > S-video
- > RCA™ Composite
- > RCA Audio (L,R)

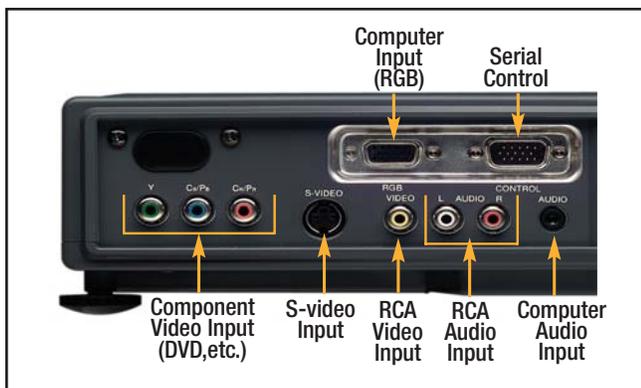

BASIC SPECS

- > 1200 lumens
- > 5.5 lbs / 2.5 kg
- > XGA (1024x768) resolution
- > 400:1 Contrast ratio
- > Digital keystone
- > Whisper mode
- > HDTV ready

Order Number: 78-9236-6732-9

"Wherever there's a great meeting, you'll find 3M."™

1-800-328-1371

WWW.3M.COM/meetings

3M *Presentation Solutions*

SPECIFICATIONS

3M™ Multimedia Projector MP7740i

OPTICAL

- > Brightness: typical (whisper mode): 1200 (1000) lumens
- > Imager set: 0.7" Polysilicon LCD
- > Resolution (native): XGA (1024x768 pixels)
- > Resolution (maximum): UXGA (1600x1200 pixels)
- > Aspect ratio: 4:3 native, 16:9
- > Colors: 16.7 million
- > Screen size (range): 30-300 inches
- > Zoom / Focus: Manual
- > Zoom ratio: 1.2: 1
- > Projection Lens: F (focal length): 2.0-2.3 (f=17.7-21.2 mm)
- > Optional lenses: No
- > Contrast ratio (on/off): 400:1
- > Lamp: W, Type: 150w UHB
- > Lamp life (average): 2000

ELECTRICAL

- > Video compatibility: NTSC, NTSC 4.43, PAL, PAL-M, PAL-N, SECAM
- > HDTV: 480i, 480p, 525i, 525p, 720p, 1080i
- > Keystone Correction: Vertical, -10 to +10 degrees
- > Audio: 1 x 1w
- > Noise level: average (whisper): 39 (34) dB
- > Feature set: Auto off, blank, 4x digital magnification mouse emulation optional
- > Horizontal scan: 31.5-78 kHz
- > Vertical scan: 56-120 Hz
- > Power consumption: 240w
- > Power supply: Universal: 100-240V AC, 50/60 Hz
- > Regulatory approvals: UL, cUL, FCC Part 15 Class B, CE, TUV, EN60950
- > Operating temperature: 32 - 95°F (0 - 35°C)
- > Storage temperature: -4 - 140°F (-20 - 60°C)

SIZE

- > Dimensions (W x D x H): 11.4 x 8.5 x 3.3 inches (289 x 215 x 84 mm)
- > Weight: 5.5 lbs / 2.7 kg

WARRANTIES

- > Projector: 3 Years Standard
- > Extended Warranty (optional): Ultra Value (EV7740iU)
- > Lamp: 1 Year Prorated

ACCESSORIES INCLUDED

- > Power Cords (x3 - US, UK, Euro)
- > Slim remote control
- > Multilanguage Quick Start Guide
- > Multilanguage Operator's Guide CD
- > RGB computer cable
- > RCA™ video cable
- > Component video cable

OPTIONAL ACCESSORIES

- > UltraValue Warranty (EV7740iU) 78-6969-9555-0
- > Lamp (EP7740iLK) 78-6969-9565-9
- > Mouse Emulation Kit (EP7640MK) 78-6969-9233-4
- > Ceiling Mount, Gyrolock style (EP7640CM) 78-6969-9206-0
- > 26-47" Adjustable Extension for GyroLock Style Ceiling Mount (EPGyroExt) 78-6969-9564-2
- > Soft Carry Case with Shoulder Strap - Projector & Notebook Computer (EP7640CC) 78-6969-9203-7
- > Deluxe Leather Soft Case with Shoulder Strap-Projector & Notebook Computer (EP7760DCC) 78-6969-9144-3
- > Rolling Hard Shipping Case (EP7630SC) 78-6969-9035-3
- > Rolling Luggage Projector & Notebook Computer Case (EP7630DSC) 78-6969-9262-3

Projection Distance Charts - MP7740i				
Distance to Screen		Screen Size		
Minimum	Maximum	Diagonal	Width	Height
3.08ft. 0.9m	3.8ft. 1.2m	40in. 101.6cm	32in. 81.3cm	24in. 61.0cm
4.5ft. 1.4m	5.75ft. 1.8m	60in. 152.4cm	48in. 121.9cm	36in. 91.4cm
6.4ft. 2.0m	7.8ft. 2.4m	80in. 203.2cm	64in. 162.6cm	48in. 121.9cm
8ft. 2.4m	9.7ft. 3.0m	100in. 254.0cm	80in. 203.2cm	60in. 152.4cm
9.7ft. 3.0m	11.6ft. 3.5m	120in. 304.8cm	96in. 243.8cm	72in. 182.9cm
12ft. 3.7m	14.5ft. 4.4m	150in. 381.0cm	120in. 304.8cm	90in. 228.6cm
16.2ft. 4.9m	19.4ft. 5.9m	200in. 508.0cm	160in. 406.4cm	120in. 304.8cm

Note: These sizes are ±10 percent. This is due to variations in the manufacture of the lens. If you are close to one of the endpoints you should verify with your unit that the image is the proper size at the proper distance.

3M Presentation Solutions

Specifications subject to change without notice.

3M is a trademark of 3M Company. All other trade names referenced are the service marks, trademarks, or registered trademarks of their respective companies.

3M Visual Systems Division

Building A145-5N-01
6801 River Place Blvd.
Austin, TX 78726-9000

3M Canada

P.O. Box 5757
London, Ontario, Canada
N6A 4T1

3M Mexico, S.A. de C.V.

Apartado Postal 14-139
Mexico, D.F. 07070
Mexico

Litho in U.S.A. © 3M 2003

78-6970-8513-8

Important Notice

Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use.

Warranty; Limited Remedy; Limited Liability

This product will be free from defects in material and manufacture for a period of 3 years from the date of purchase. 3M MAKES NO OTHER WARRANTIES INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. If this product is defective within the warranty period stated above, your exclusive remedy shall be, at 3M's option, to replace or repair the 3M product or refund the purchase price of the 3M product. Except where prohibited by law, 3M will not be liable for any loss or damage arising from this 3M product, whether direct, indirect, special, incidental or consequential regardless of the legal theory asserted.