

Multimedia Projector

3M™ MULTIMEDIA PROJECTOR MP8775

The 3M Multimedia Projector MP8775.

The 3M™ Multimedia Projector MP8775 is the large venue presentation solution. The radiant 3,200 ANSI lumens and XGA (1024 x 768) resolution ensure your presentation will not be forgotten. Your video presentations will come to life thanks to the Progressive Scan Video technology and HDTV compatibility. Continue to impress your audience with top quality video images using the DVI-D and Component Video connections. The Digital Keystone Correction feature provides a square image every time, and at only 14.1 pounds the MP8775 is easy to set-up or install.

KEY FEATURES

- **3,200 ANSI lumens** of brightness
 - **XGA (1024 x 768)** resolution for sharper images
 - **Progressive Scan Video** utilizes the latest technology for top quality video replication
 - **DVI-D and Component Video Connections** provide full connectivity for video applications such as DVD players
 - **HDTV compatible** for versatility in your meeting or training space
 - **Intelligent image scaling** technology optimizes image quality for SXGA, SVGA, VGA resolution and video
 - **Digital Keystone Correction 0-10°** with keystone free image
 - **Short throw and long throw lens** options for installation versatility
 - **Four times Magnification** for detailed information
 - **Adjustable Auto Off** saves lamp hours
 - **Power zoom and focus**
 - **Full connectivity** for the simultaneous connection of two computers and a video signal
 - **VirtualMouse remote control** with power zoom, power focus and presentation tools
 - **Five presentation tools:** blank, laser pointer, timer, magnification, mouse emulation
 - **Universal power supply**, for use anywhere in the world
 - **Monitor loop-through** lets you view an external monitor and your projected image simultaneously
 - **Universal Serial Bus (USB)** connectivity for mouse (or cursor) control
 - **Kensington® Security Slot** for protection from theft (Kensington Microsaver needed)
 - **Ceiling mountable**
 - **1.3:1 zoom** range allows flexibility based upon the size of room
- Computer Compatibility:**
- IBM® and compatible — SXGA, XGA, SVGA, VGA, DVI-D
 - Apple® Macintosh® (II, LC, Quadra, PowerPC, PowerBook®, iMac®DV+, and iMac®DV Special Edition)

Video Compatibility:

- Autosync: NTSC, NTSC 4.43, PAL, PAL-M, PAL-N, SECAM
- Composite and S-VHS, Component

Accessories Included:

- VGA cable
- RCA Component Video Cable, RCA™ video cable, S-VHS cable, dual RCA audio cable
- Serial, ADB and PS/2 mouse cables
- Remote control
- Detachable power cords
- Stereo mini-jack
- Multilanguage operator's guide

Optional

- Short-throw lens (customer attachable) 78-6969-9251-6 (EP8755AS)
- Long-throw lens version 78-9236-6610-9 (MP8775L)

Optional Accessories

- Adjustable Height Suspension 8-6969-8312-7 (EP1610)
- Ceiling Mount 78-6969-8924-9 (EP1535)
- Replacement Lamp Kit 78-6969-9295-3 (EP8775LK)
- RGB Cable Extension Kit 78-6969-8582-5 (EP1880)

TECHNICAL SPECIFICATIONS

- Display: 1.3" active matrix polysilicon TFT (x3)
- Resolution: 1024 (W) x 768 (H) pixels (XGA)
- Brightness: 3,200 ANSI lumens (typical)
- Weight: 14.1 lbs. (6.4 kg.)
- Dimensions: 13.8" (35 cm) L x 4.9" (12.4 cm) H x 11.4" (28.9 cm) W
- Colors: 16.7 million (maximum)
- Contrast ratio: 300:1 peak (150:1 ANSI)
- Aspect ratio: 4:3 or 16:9
- Zoom lens: 1.3:1
- Screen size: 40" (minimum) to 200" (maximum) diagonal
- Horizontal scan: 31–80 kHz (pending resolution)
- Vertical scan: 60–120 Hz (pending resolution)
- Speakers: 2, 1.2-watt stereo
- Lamp type: 250 watt UHB
- Lamp life: 1,500 hours (average)
- Operating temperature: 32°F (0°C) to 95°F (35°C)
- Storage temperature: -4°F (-20°C) to 140°F (60°C)
- Power consumption: 400 watts (maximum)
- Power supply: Universal 100-120V AC, 220-240V AC, 50/60 Hz
- Regulatory approvals: FCC Part 15 Class A, CE, UL, TUVGS
- Order Number: 78-9236-6592-7


Warranties:

Prime Value: Two-year limited warranty on parts and labor
Original lamp prorated for one year

Max Value: 78-6969-9329-0

Ultra Value: 78-6969-9330-8

*"Wherever there's
a great meeting,
you'll find 3M."*™

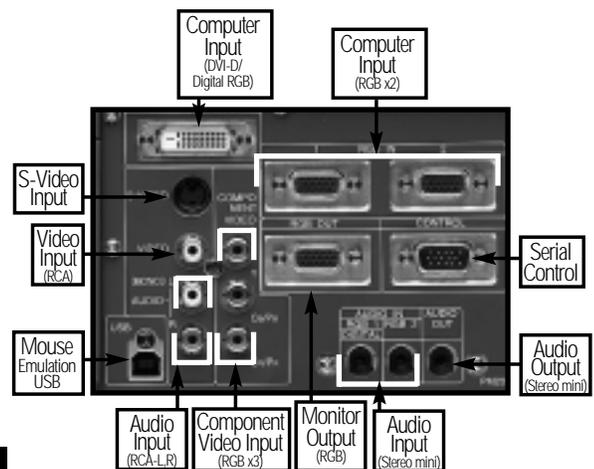

3M™ MULTIMEDIA PROJECTOR MP8775



Hard Shipping Case for 3M MP8745/8755/8770/8775

This rugged shipping case is custom-designed to safeguard your 3M MP8775 projector from the hazards of travel. It features a hard shell, locking extension handle, wheels and a lock. Internal storage area holds cords, cables, remote and more.

Dimensions: 10" (H) x 24.75" (W) x 16.5" (L)
Weight: 26 lbs.
Order number: 78-6969-8925-6 (EP1545)



Wheeled Soft Travel Case for 3M MP8745/8755/8770/8775

This soft travel case features a locking extension handle, a detachable briefcase and wheels. Made from durable DuPont™ Ballistic Nylon. Compliant with all airline carry-on requirements so it fits easily in airplane overhead compartments.

Order number: 78-6969-8926-4 (EP1555)

RGB Cable Extension Kit

Order number: 78-6969-8582-5 (EP1880)

Object Display Camera 3M EP1840

Order number: 78-6969-8578-3



Regular Lens Projector-to-Screen Distance (Included)

Distance to Screen		Diagonal	Width	Height
Minimum	Maximum			
4.6 ft.	6.1 ft.	40 in.	32 in.	24 in.
9.5 ft.	12.6 ft.	80 in.	64 in.	48 in.
14.7 ft.	19.3 ft.	120 in.	96 in.	72 in.
24.3 ft.	32.2 ft.	200 in.	160 in.	120 in.

Short Throw Lens Projector-to-Screen Distance (Optional)

Distance to Screen		Diagonal	Width	Height
Minimum	Maximum			
3.0 ft.	3.6 ft.	30 in.	24 in.	18 in.
3.6 ft.	5.2 ft.	40 in.	32 in.	24 in.
5.9 ft.	7.9 ft.	60 in.	48 in.	36 in.
6.6 ft.	9.2 ft.	70 in.	56 in.	42 in.
7.9 ft.	10.2 ft.	80 in.	64 in.	48 in.
9.8 ft.	13.1 ft.	100 in.	80 in.	60 in.
12.1 ft.	15.7 ft.	120 in.	96 in.	72 in.
15.1 ft.	19.4 ft.	150 in.	120 in.	90 in.
20.0 ft.	26.2 ft.	200 in.	160 in.	120 in.
24.9 ft.	33.5 ft.	250 in.	200 in.	150 in.
30.2 ft.	40.0 ft.	300 in.	240 in.	180 in.

Long Throw Lens Projector-to-Screen Distance (Optional)

Distance to Screen		Diagonal	Width	Height
Minimum	Maximum			
9.8 ft.	12.5 ft.	30 in.	24 in.	18 in.
12.8 ft.	16.4 ft.	40 in.	32 in.	24 in.
19.0 ft.	24.6 ft.	60 in.	48 in.	36 in.
22.0 ft.	28.5 ft.	70 in.	56 in.	42 in.
24.9 ft.	32.5 ft.	80 in.	64 in.	48 in.
31.2 ft.	40.7 ft.	100 in.	80 in.	60 in.
37.1 ft.	48.9 ft.	120 in.	96 in.	72 in.
46.3 ft.	60.7 ft.	150 in.	120 in.	90 in.
61.7 ft.	81.0 ft.	200 in.	160 in.	120 in.
76.8 ft.	101.0 ft.	250 in.	200 in.	150 in.
92.2 ft.	121.4 ft.	300 in.	240 in.	180 in.

Note: These sizes are ±1%. This is due to variations in the manufacture of the lens. If you are close to one of the endpoints you should verify with your unit that the image is the proper size at the proper distance.

3M Enhanced Value Warranties for 3M MP8775

Receive a one-year Prorated Warranty on your original lamp and guaranteed repair and return of your projector with the Prime Value Warranty. Purchase the Max or Ultra Value Warranties and receive:

Max Value:

- Parts and Labor 2 years (Total)
- Free loaner* delivery next business day
- Paid shipping
- 1 Free lamp during term of warranty
- Repair turn-around time—3 business days
- Max Value (2 year total warranty) 78-6969-9329-0

Ultra Value:

- Parts & Labor 3 years (Total)
- Free loaner* delivery next business day
- Paid shipping
- 1 Free lamp during term of warranty
- Repair turn-around time—3 business days
- Ultra Value (3 year total warranty) 78-6969-9330-8

Ceiling Mount for 3M MP8745/8755/8770/8775

Order number: 78-6969-8924-9 (EP1535)

Adjustable Height Suspension

Order number: 78-6969-8312-7 (EP1610)

*“Wherever there’s
a great meeting,
you’ll find 3M.”™*

www.3M.com/meetings



3M Visual Systems Division
Building A145-5N-01
6801 River Place Blvd.
Austin, TX 78726-9000

3M Canada

P.O. Box 5757
London, Ontario, Canada
N6A 4T1

3M Mexico, S.A. de C.V.

Apartado Postal 14-139
Mexico, D.F. 07070
Mexico

Specifications subject to change without notice.

Apple, Macintosh, Mac, Power Macintosh and PowerBook are registered trademarks of Apple Computer, Inc. PS/2 are registered trademarks of IBM Corp. RCA is a trademark of Radio Corporation of America.

Litho in U.S.A. © 3M IPC 2001
78-6970-8499-0