

# 3M™ Multimedia Projector MP8795



*Powerful light output*

*Ideal for larger rooms*


*Connectivity for almost all types of applications*

*Full range of video connections*

## BASIC SPECS

- > **4500 lumens**
- > **14.3 lbs / 6.5 kg**
- > **XGA (1024x768) resolution**
- > **300:1 Contrast ratio**
- > **Horizontal & Vertical keystone**
- > **Whisper mode**
- > **HDTV ready**

## CONNECTIONS

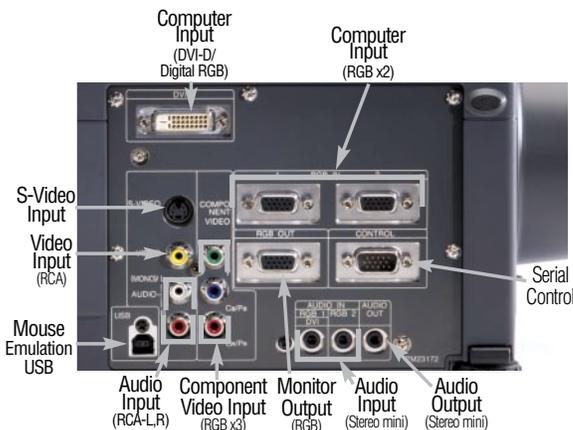

### COMPUTER

- > RGB (x2 input) (x1 output)
- > Computer (DVI-D x1)
- > Audio (x2 input) (x1 output)
- > Serial Control

### VIDEO

- > Component (3)
- > S-Video
- > RCA Composite
- > RCA Audio (L,R)
- > Mouse Emulation (USB x1)

## WARRANTY

### Important Notice

Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use.

### Warranty; Limited Remedy; Limited Liability.

This product will be free from defects in material and manufacture for a period of 3 years from the date of purchase. 3M MAKES NO OTHER WARRANTIES INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. If this product is defective within the warranty period stated above, your exclusive remedy shall be, at 3M's option, to replace or repair the 3M product or refund the purchase price of the 3M product. Except where prohibited by law, 3M will not be liable for any loss or damage arising from this 3M product, whether direct, indirect, special, incidental or consequential regardless of the legal theory asserted.

**1-800-328-1371**

**www.3M.com/meetings**

**3M** Presentation Solutions

## OPTICAL

- > Brightness: typical : 4500 lumens (3600 whisper mode)
- > Imager set: 1.3" Polysilicon LCD
- > Resolution (native): XGA (1024x768 pixels)
- > Resolution (maximum): SXGA (1280x1024 pixels)
- > Aspect ratio: 4:3 native, 16:9
- > Colors: 16.7 million
- > Screen size (range): 30-300 inches
- > Zoom / Focus: Power
- > Zoom ratio: 1.3: 1
- > Projection lens: F (focal length): F 1.7-2.3 (f = 49-64 mm)
- > Optional lens: Telephoto
- > Contrast ratio (on/off): 300:1
- > Lamp: W, Type: 275w UHB
- > Lamp life (average): 2000

## ELECTRICAL

- > Video compatibility: NTSC, NTSC4.43, PAL, PAL-M, PAL-N, SECAM
- > HDTV: 480i, 480p, 525i, 525p, 720p, 1080i
- > Keystone Correction: Horizontal  $\pm 5^\circ$  & Vertical  $\pm 15^\circ$
- > Audio: 2 x 1.2w
- > Startup Screen: Customizable
- > Picture in Picture: Yes
- > Noise level: normal (whisper): 40 (36) dB
- > Feature set: Auto off, 4x digital magnification, blank, mouse emulation
- > Horizontal scan: 31-80 kHz
- > Vertical scan: 60-120 Hz
- > Power consumption: 440w
- > Power supply: Universal: AC 90-132V/ 198-264 (50/60 Hz)
- > Regulatory approvals: UL, cUL, FCC Part 15 Class B, CE, TUV, EN60950
- > Operating temperature: 32° - 95° F (0° - 35° C)
- > Storage temperature: -4° - 140° F (-20° - 60° C)

## SIZE

- > Dimensions (WxDxH): 12.1 x 15.6 x 5.7 inches (308 x 395 x 144 mm)
- > Weight: 14.3 lbs / 6.5 kg

## WARRANTIES

- > Projector: 3 Years Standard
- > Extended Warranty (optional): Ultra Value (EV8795U)78-6969-9654
- > Lamp: 1 Year Prorated

## ACCESSORIES INCLUDED

- > Power Cords (x3 - US, UK, Euro)
- > RGB computer cable
- > Full function remote control
- > RCA audio & video cable
- > S-video cable
- > Component video cable
- > Stereo mini audio cable
- > Serial control cable
- > PS/2 adapter
- > Multilanguage Quick Start Guide
- > Multilanguage Operator's Guide CD
- > ADB adapter

## OPTIONAL ACCESSORIES

- > UltraValue Warranty 78-6969-9654-1
- > Lamp 78-6969-9548-5
- > Ceiling Mount (EP1535) 78-6969-8924-9
- > 24-48" Adjustable Extension for Ceiling Mount EP1535 (EP1610) 78-6969-8312-7
- > Rolling Soft Carry Case (EP1555) 78-6969-8926-4
- > Rolling Hard Shipping Case (EP1545) 78-6969-8925-6



## Projection Distance Chart-MP8795

Standard Lens Size Included

Distance to Screen		Screen Size		
Minimum	Maximum	Diagonal	Width	Height
4.6 ft. 1.4 m	6.1 ft. 1.9 m	40 in. 101.6 cm	32 in. 81.3 cm	24 in. 61.0 cm
9.5 ft. 2.9 m	12.6 ft. 3.8 m	80 in. 203.2 cm	64 in. 162.6 cm	48 in. 121.9 cm
14.7 ft. 4.5 m	19.3 ft. 5.9 m	120 in. 304.8 cm	96 in. 243.8 cm	72 in. 182.9 cm
24.3 ft. 7.4 m	32.2 ft. 9.8 m	200 in. 508.0 cm	160 in. 406.4 cm	120 in. 304.8 cm

Note: These sizes are  $\pm 1\%$ . This is due to variations in the manufacture of the lens. If you are close to one of the endpoints you should verify with your unit that the image is the proper size at the proper distance.

Telephoto lens is also available.  
Call 1-800-328-1371 for more information.

## MP8795: 78-9236-6765-9