

# 3M™ Digital Projector S40 and X40



DESIGN BY

*pininfarina*

Official Designer of Ferrari for over 50 years.

- A sleek design so that you create just the right image!
- Complete with 3M quality and technical support.
- For use on the road, in the office or at home.
- Delivers powerful computer and video images.



## CONNECTIONS

### COMPUTER

- RGB
- Audio & composite (stereo mini)
- Serial Control


### VIDEO

- Component Video
- S-Video
- RCA Composite
- RCA Audio (L,R)

### BASIC SPECS

- **S40:** 1400 lumens | **X40:** 1200 lumens
- **S40:** SVGA (800x600) | **X40:** XGA (1024x768)
- 5.5 lbs / 2.5 kg
- Vertical Digital keystone
- HDTV ready
- Whisper mode increases lamp life of up to a total of 4000 hours

**S40 Order Number:** 78-9236-6817-8  
**X40 Order Number:** 78-9236-6816-0

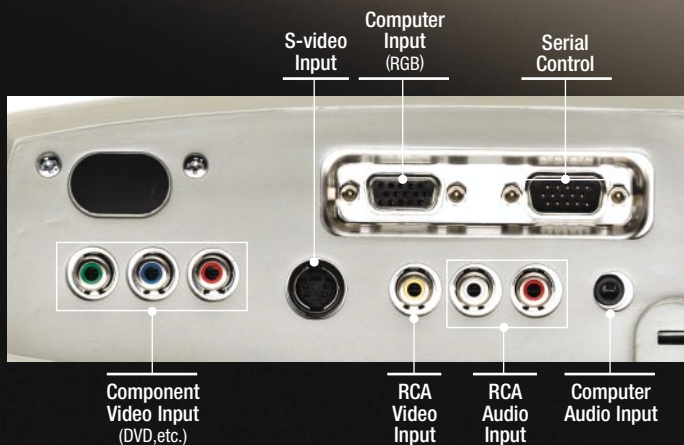

1-800-328-1371

[www.3m.com/meetings](http://www.3m.com/meetings)

**3M** Innovation

# 3M™ Digital Projector S40 and X40



## OPTICAL

- Brightness: typical : **S40:** 1400 lumens (1120 whisper mode)  
**X40:** 1200 lumens (1000 whisper mode)
- Imager set: 0.7" Polysilicon LCD
- Resolution (native): **S40:** SVGA (800x600 pixels)  
**X40:** XGA (1024x768 pixels)
- Resolution (maximum): **S40:** SXGA (1280x1024 pixels)  
**X40:** UXGA (1600x1200 pixels)
- Aspect ratio: 4:3 native, 16:9
- Colors: 16.7 million
- Screen size (range): 30-300 inches
- Zoom / Focus: Manual
- Zoom ratio: 1.2: 1
- Projection lens: F (focal length): (1.7-1.9) (f =21.7-26.1 mm)
- Optional lenses: No
- Contrast ratio (peak): **S40:** 350:1, **X40:** 400:1
- Lamp: W, Type: 150w UHB
- Lamp life (average): 2000 (whisper mode): up to 4000 hours

## ELECTRICAL

- Video compatibility: NTSC, NTSC 4.43, PAL, PAL-M, PAL-N, SECAM
- HDTV: 480i, 480p, 525i, 525p, 720p, 1080i
- Keystone Correction: Vertical, -10° to +10°
- Audio: 1 x 1w
- Noise level: normal (whisper): 39 (34) dB
- Feature set: Auto off, 4x digital magnification, blank, mouse emulation (optional)
- Horizontal scan: 31-91 kHz
- Vertical scan: 56-120 Hz
- Power consumption: 240w
- Power supply: Universal: 90-132V / 198-264V (50/60 Hz)
- Regulatory approvals: UL, cUL, FCC Part 15 Class B, CE, TUV, EN60950
- Operating temperature: 32 - 95 F (0 - 35 C)
- Storage temperature: -4 - 140 F (-20 - 60 C)

## SIZE

- Dimensions (W x H x D): 11.4 x 3 x 8.3 in. (289 x 76 x 210 mm)
- Weight: 5.5 lbs / 2.5 kg

## WARRANTIES

- Projector: 3 Years Standard
- Ultra Value Warranty available—includes free lamp and free loaner while unit is repaired and expedited service.
- Lamp: 1 Year Prorated

**3M Visual Systems Division**  
Building A145-5N-01  
6801 River Place Blvd.  
Austin, TX 78726-9000

**3M Mexico, S.A. de C.V.**  
Apartado Postal 14-139  
Mexico, D.F. 07070  
Mexico

**3M Canada**  
P.O. Box 5757  
London, Ontario, Canada  
N6A 4T1

Litho in U.S.A. © 3M 2003  
**78-6970-8583-1**  
(09.03.15m)

## ACCESSORIES INCLUDED

- Power Cords (x3 - US, UK, Euro)
- RGB computer cable
- Remote control
- RCA™ video cable
- Soft side bag
- RCA to mini stereo audio cable
- Component video cable
- Multilanguage Quick Start Guide
- Multilanguage Operator's Guide CD

## OPTIONAL ACCESSORIES

- Ultra Value Warranty S40 (WS40) 78-6969-9702-8
- Ultra Value Warranty X40 (WX40) 78-6969-9703-6
- Lamp (EP7640iLK) 78-6969-9463-7
- Mouse Emulation Kit (EP7640MK) 78-6969-9233-4
- Ceiling Mount, Gyrolock style (CM40/50) 78-6969-9695-4
- 26-47" Adjustable Extension for GyroLock Style Ceiling Mount (HE100) 78-6969-9698-8
- Soft Carry Case with Shoulder Strap - Projector & Notebook Computer (CC10/40/50) 78-6969-9715-0
- ATA Rolling Hard Shipping Case (HSC10/40/50) 78-6969-9717-6
- Soft Rolling Luggage Case (Projector & Notebook Computer) (SSC10/40/50) 78-6969-9716-8

PROJECTION DISTANCE CHARTS — 3M S40 AND X40				
Distance to Screen		Screen Size		
Minimum	Maximum	Diagonal	Width	Height
3.08ft. 0.9m	3.8ft. 1.2m	40in. 101.6cm	32in. 81.3cm	24in. 61.0cm
4.5ft. 1.4m	5.75ft. 1.8m	60in. 152.4cm	48in. 121.9cm	36in. 91.4cm
6.4ft. 2.0m	7.8ft. 2.4m	80in. 203.2cm	64in. 162.6cm	48in. 121.9cm
8ft. 2.4m	9.7ft. 3.0m	100in. 254.0cm	80in. 203.2cm	60in. 152.4cm
9.7ft. 3.0m	11.6ft. 3.5m	120in. 304.8cm	96in. 243.8cm	72in. 182.9cm
12ft. 3.7m	14.5ft. 4.4m	150in. 381.0cm	120in. 304.8cm	90in. 228.6cm
16.2ft. 4.9m	19.4ft. 5.9m	200in. 508.0cm	160in. 406.4cm	120in. 304.8cm

**Note:** These sizes are ±10 percent. This is due to variations in the manufacture of the lens. If you are close to one of the endpoints you should verify with your unit that the image is the proper size at the proper distance.

### Important Notice

Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use.

### Warranty; Limited Remedy; Limited Liability

This product will be free from defects in material and manufacture for a period of time specified on product packaging from the date of purchase (length of warranty period varies by region). 3M MAKES NO OTHER WARRANTIES OR CONDITIONS INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. If this product is defective within the warranty period, your exclusive remedy shall be, at 3M's option, to replace or repair the 3M product. Except where prohibited by law, 3M will not be liable for any loss or damage arising from this 3M product, whether direct, indirect, special, incidental or consequential regardless of the legal theory asserted.

1-800-328-1371

www.3m.com/meetings

Specifications subject to change without notice.

3M is a trademark of 3M Company. Used under license in Canada. All other trade names referenced are the service marks, trademarks, or registered trademarks of their respective companies.

Recycled Paper  
10% post-consumer