

Canon

**Micro-portable
Multimedia Projector**

LV-5110



Enlighten Your Audience a Whole New Way

The LV-5110 takes micro-portability to new heights. Weighing a mere 6 pounds, it delivers an impressive 850 ANSI Lumens for breathtaking and memorable presentations. Easy to use, and packed with features, the LV-5110 is perfect for all your needs.

850 ANSI Lumens

Bright images are achieved in even the most challenging lighting conditions. At a blazing 850 ANSI Lumens, the LV-5110 is one of the brightest projectors in the SVGA Micro-portable class. Its projected image can fill a 200" screen with a uniform brightness of 90%.



Native SVGA Performance

The LV-5110 delivers sharp Native SVGA Resolution (800 x 600) as well as VGA (640 x 480). It can also project XGA (1,024 x 768) and SXGA (1,280 x 1,024) through high quality compression.

Compact Design

Weighing approximately 6 pounds, and measuring no larger than a legal size sheet of paper, the portable and stylish LV-5110 is light enough to carry anywhere, making it ideal for the presenter on the go.





www.canonprojectors.com



Variety of Inputs

The LV-5110 works comfortably with Mac and Windows platforms, allowing you to quickly plug in your laptop or desktop computer at a moment's notice. It also features Component, S-video, and Composite video inputs for compatibility with DVD, HDTV, digital cameras, camcorders, and VCRs. It can even handle 16:9 wide screen aspect ratio, as well as NTSC, PAL, and SECAM.

Nomenclature

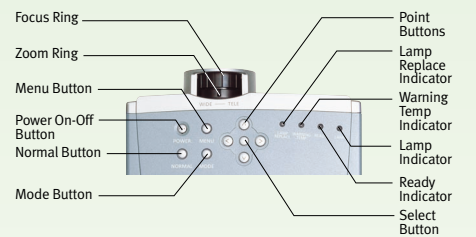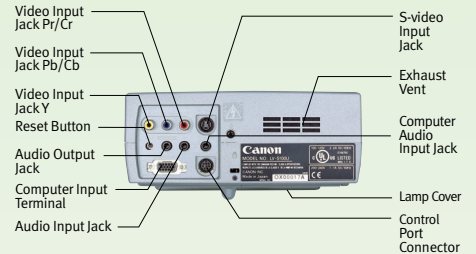


Specifications

Type: Micro-portable LCD Projector
LCD Panel: 0.7" polysilicon active matrix TFT x 3. 4:3 aspect ratio
Number of Pixels: 480,000 800(H) x 600(V) x 3
Supported Display Standards: SXGA (Compression), XGA (Compression), SVGA and VGA
Light Source: 132 W UHP lamp
Brightness: 850 ANSI lumens
Uniformity: 90%
Contrast Ratio: 300:1 (All white/All black)
Horizontal Resolution: 500 TV lines
Projection Lens: 28 to 33.6mm, 2.0 to 2.3, x 1.2
Lens Shifting: 12:1
Elevation Adjustment: Up by 7.5° (One-touch adjustment)
Projected Image Size (Projection Distance): **WIDE mode:** 36" (1.4m) 60" (2.4m) 100" (4.0m) 150" (6.0m) 200" (8.0m)
TELE mode: 30" (1.4m) 50" (2.4m) 83" (4.0m) 125" (6.0m) 167" (8.0m)
Digital Keystone Distortion Compensation Angle: ±15°
Noise: 39 dB (at low fan speed)
Color System: NTSC, PAL, SECAM, NTSC 4.43, PAL-M, PAL-N
Supported Computers: IBM PC compatible, Macintosh, PC98, workstation. (Some workstations are not supported.)
Scanning Frequency: 15 to 80kHz for horizontal sync. 50 to 100Hz for vertical sync. 100MHz for dot clock.
Audio Output: 1 W monaural
Built-in Speaker: 4cm x 3cm, x 1
Rated Supply Voltage: 100 to 120/200 to 240V AC, 50/60 Hz
Power Consumption: 210 W
Ambient Operating Temperature: 41 to 95°F (5 to 35°C)
Storage Temperature: 14 to 140°F (-10 to 60°C)
Dimensions: 7.4(W) x 3.0(H) x 12.2(D) in. /189(W) x 75.5(H) x 310.8(D) mm excluding legs. (Legs: 0.7 in./ 15mm)
Weight of Main Unit: Approx. 5.95 lbs (2.7 kg)

All specifications subject to change without notice. Canon is a registered trademark of Canon Inc.

LV-5110

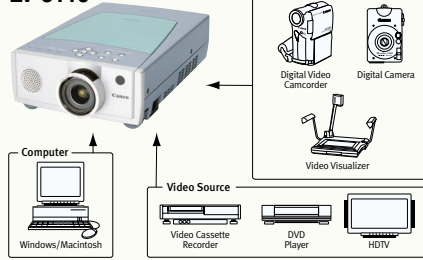

Quiet Operation

A variable speed fan reduces operating noise to 39dB, resulting in quieter performance than conventional projectors.

Digital Keystone Adjustment

If you have to mount the projector somewhere that is higher or lower than your screen, Canon's Digital Keystone function compensates for angles +/- 15°, so you always show a square, undistorted image.

Hybrid Gamma Compensation

Gamma compensation optimizes the input and projector characteristics for an image free of washed-out or blacked-out areas, and uniform color gradation throughout the image.




Graphical User Interface

The LV-5110 features a user-friendly on-screen menu for adjustment of color, contrast, sharpness, and more.

1.2x Optical/16x Digital Zoom

A manual zoom ring allows you to zoom the image 1.2x. Need a closer look? Any portion of the screen can be digitally enlarged up to 16x for an enhanced view.

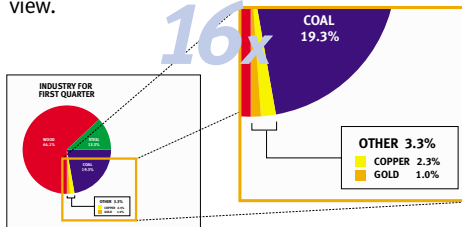

Plug And Play

Images are projected immediately after connecting to a PC or AV equipment – no adjustments are required. Provides multi-scan, auto detection of the video signal, and automatic optimization of tracking and image position.

Advanced Remote Control

With the supplied remote control, the LV-5110 may be controlled anywhere in the room. It may also be used as a wireless mouse, allowing you to interact with your audience during a presentation.

Manual Focus

Ceiling/Reverse Function

Lamp Replacement Indicator

Built-In Speaker

Audio Input/Output

LV-5110 Kit Contents:

- LV-5110 Projector • Power Cable
- VGA Computer Cable • Wireless Remote Control Unit (AA Alkaline Batteries)
- Mouse Control Cable for PS/2 • Lens Cap
- Soft Carrying Case • Warranty Card
- User Manual

Canon KNOW HOW™

Canon U.S.A., Inc.
 One Canon Plaza
 Lake Success, NY 11042, U.S.A.

Canon Canada Inc.
 6390 Dixie Road
 Mississauga,
 Ontario L5T 1P7, Canada

Canon Mexicana, S. DE R.L. DE C.V.
 Periférico Sur No. 4124, 5º y 6º pisos,
 Col. Ex-Rancho de Anzaldo,
 01900 México, D.F.

Canon Latin America
 6505 Blue Lagoon Dr., Suite 325,
 Miami, FL 33126, U.S.A.

1-800-OK-CANON www.canonprojectors.com